

## 98-549: Electronic Multi Adapter For 2~ , 120V 230 series track

**Material:** Unit is fabricated of self extinguishing polycarbonate according to class VO.

**Color:** -1: White, -2: Black, -3: Silver

### Specifications:

Multi adapter is specifically for 2~ 120V track, with integrated ballast for low voltage halogen lamps according to EN 60950 with electronic overload and short circuit protection. External dimming is possible with trailing edge phase dimmer;

Un = 120V (50-60 Hz)


Usec = 11.6 V (SELV)

Included are screw termination clamps and nickel plated contacts. Approved for 6A inductive /6A ohmic up to 120V. With earth contact, circuit selection by turnkey switch and optional neutral position during operation.

### Overall Size:

8"L x 1 5/16"W x 2 3/16"H

(203 x 33 x 56mm)

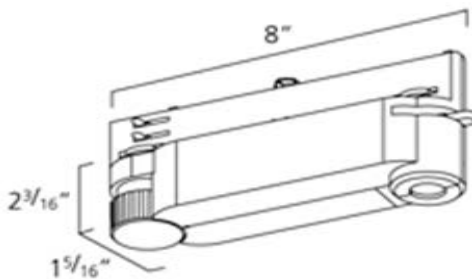

**Locking Mechanism:** Double locking mechanism provides positive locking method across the entire length of adapter to track. Maximum load up to 11 lbs. (5 kilos) With the addition of retaining collar 99-066- maximum load increases to 22 lbs. (10 kilos)

This information is subject to change without notice.



### Application:

The installation of the Multi adapter can be done on ceiling mounted, recessed profiles and suspended installation applications on 230 series track.

The installation of the Multi adapter can be done on ceiling mounted, recessed profiles and suspended installation applications.

